

WindRestrictor[®]

World's First Fully Personalized Wind Deflector




Mustang 4 Seat Convertible (2015+) Installation Guide

Parts included:

Wind deflector glass	Attached stabilizing bar and plate
(4) 10-32 x 3/4" bracket screws	15 lamp LED strip if illuminated
(2) bracket plates	(4) #10-32 bracket hex nuts
Left & right mounting bracket	(4) #10-32 x 1/2" plate screws
Gloves	Sample Cleaner

Tools needed:

3/8" Box end wrench	1/8" short-arm Allen/Hex wrench
Pair of pliers	Exacto knife or razor blade

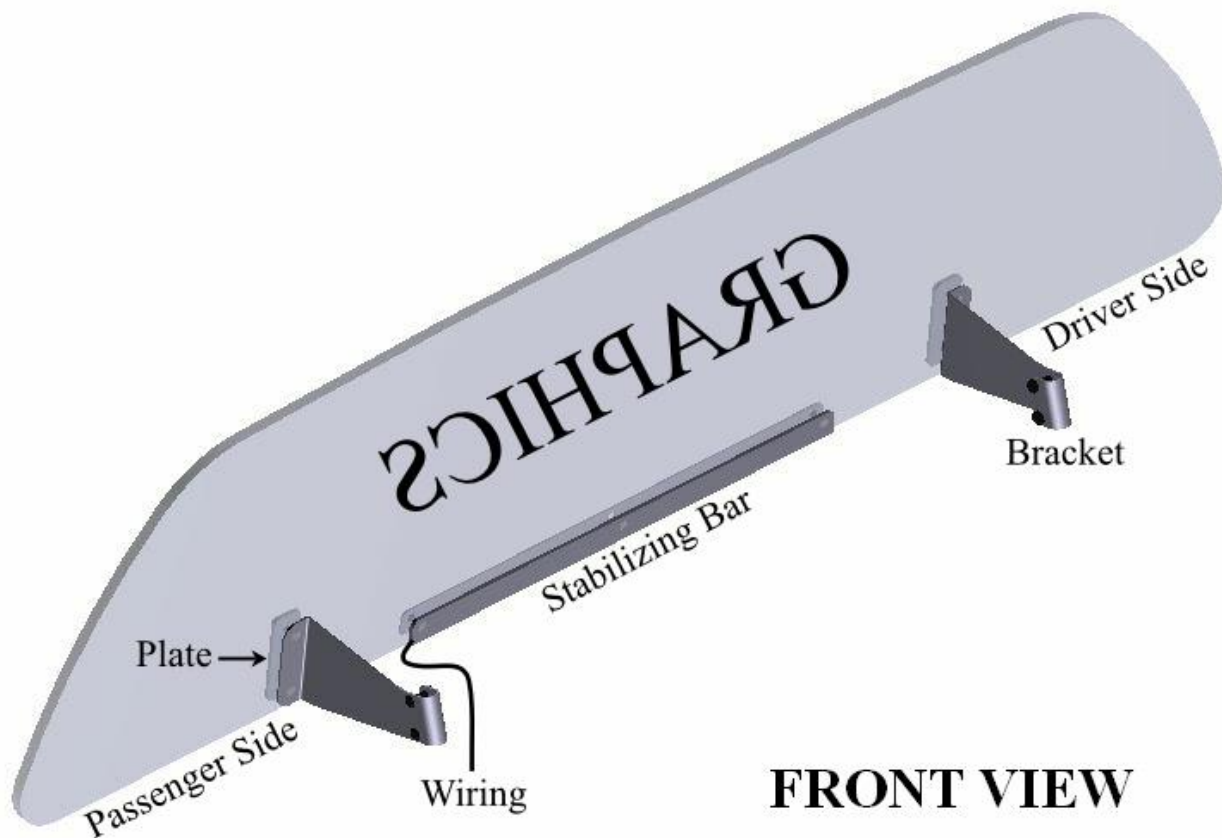


FRONT VIEW

Note: This wind deflector is installed by attaching the two mounting brackets to the factory designed front seat headrest posts so that the glass is to the rear of the headrest.

INSTALLATION INSTRUCTIONS

Step 1 Carefully attach the mounting brackets and plates to the glass, using the 4 short #10-32 x 1/2" plate screws, so as not to leave any smudges or fingerprints, use gloves provided. Graphics should be read from the rear of vehicle when installed. The hook bends on the mounting brackets should face toward the center of product and the mounting brackets should be installed with the flat side facing down. See the figure above for the proper position.


ARM BRACKETS INSTALLED WITH
FLAT SIDE FACING DOWN

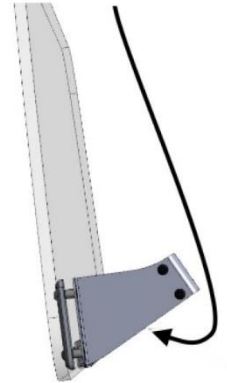

Step 2 Move the seats to their most forthright position and equal to each other, so as to gain access to the rear side of headrests. Raise both headrests to the upright position. Mounting brackets attach to the headrest post.



Step 3 Adjust the seat elevation to the same height on both sides and attach the wind deflector to the headrest post using a 1/8" Allen/Hex wrench for the (4) #10-32 x 3/4" screws and a 3/8" box end wrench for the (4) hex nuts. A helper is recommended for this step. The hooks from each arm bracket should fit snug around the inside posts just below the headrests. Move the brackets to the same post elevation and tork the screws down tight.

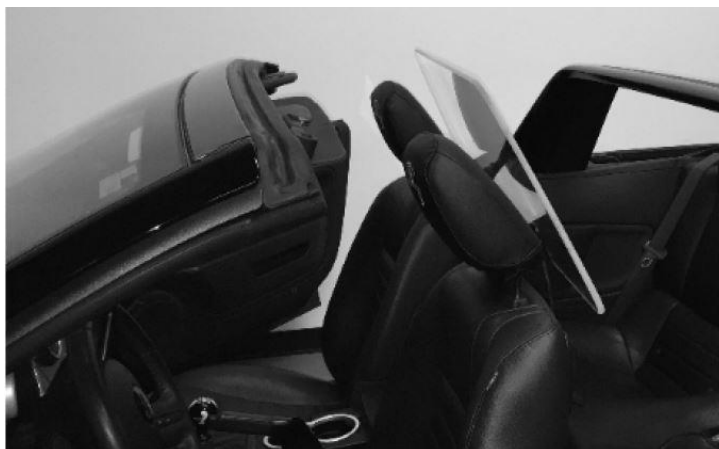

Tip: This product was designed for use with the windows up. At highway speeds, with top down and windows up there is a significant reduction of wind turbulence within the cabin. The amount of air reduction can be adjusted by raising and lowering the windows.


This concludes the basic installation. For illuminated models proceed to step 4.

Step 4 Guide the wiring harness down side of seat and tuck underneath carpet, directing it towards the back passenger seat. Push the wire between the side panel and middle of back seat, into the trunk space. Track it along the fender, under the carpet to the passenger side tail light.

Step 5 Wiring to passenger side brake light harness:

(Black) *Negative Wire*: Ground to car chassis or framework.

(Black-White) *Positive Wire*: For **brake light operation** only, tap onto the red and yellow wire. To connect to the **running lights** so that the wind deflector will illuminate anytime that the car lights are on, tap onto the green and purple wire.

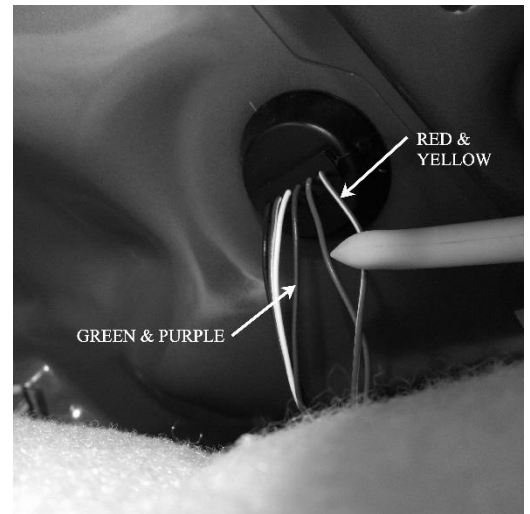

Accessories:

When purchased, please refer to the product specific instructions provided with accessory.